


D05 High Flow Series Circuit Manifold

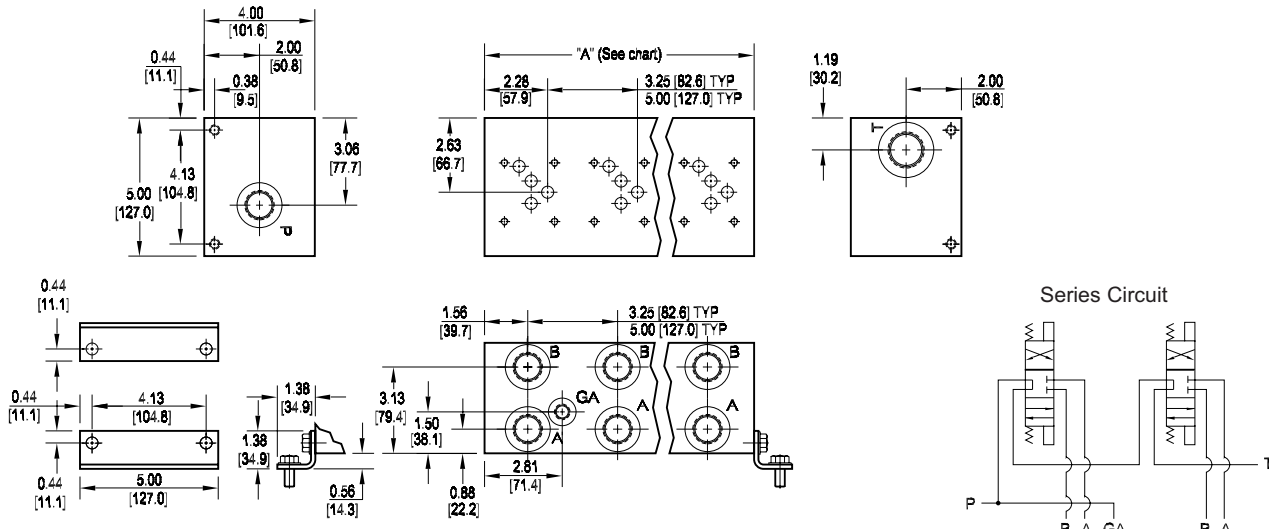

| No. of stations | 02 | 03 | 04 |
|---------------------------------------|-----------------|------------------|------------------|
| "A" length (code 3 spa.) inch [mm] | 6.50 [165.1] | 9.75 [247.7] | 13.00 [330.2] |
| apx. weight alum lb [kg] | 12 [5] | 17 [8] | 22 [10] |
| apx. weight iron lb [kg] | 38 [17] | 57 [26] | 75 [34] |
| "A" length (code 5 spa.) inch [mm] | 8.25 [209.6] | 13.25 [336.6] | 18.25 [463.6] |
| apx. weight alum lb [kg] | 18 [8] | 26 [12] | 33 [15] |
| apx. weight iron lb [kg] | 48 [22] | 77 [35] | 106 [48] |

All mounting hardware is supplied.
See page 62 for itemized list.




| Port code | Valve mtg. | Manifold mtg. |
|-----------|-------------------------------|-------------------------------|
| P, S | 0.25-20 UNC x 0.75 [19] DP | 0.38-16 UNC x 0.75 [19] DP |
| B, M, T | M6 ISO 6H x 0.75 [19] DP | M10 ISO 6H x 0.75 [19] DP |

Specifications, descriptions, and dimensional data are subject to correction or change without notice or incurring obligation.
Download latest catalog page revisions at www.damanifolds.com.

Ordering Information

| Material | Valve Pattern | Circuit | No. of Stations | Valve Spacing | Port Threads | Options | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---------|-------------------|--|--------------|--|---|---------------|--|------------|---|---|---------|--|-----------|-----------------------------|---|-----------------|--|----------|--|----------------|-------------------------------|----------------|-------------------------------|--------------|--|----------------|-------------------------------|----------------|-------------------------------|--|---------------|--|----------|----------------------|----------|-----------------------|--|--------------|--|--|--|--|--|--|-------|---|-------------------|----|--|----------|---------------------|------|------|------|------|----------|-----------------|-----|-----|----|----|----------|-----------------|------|------|------|------|----------|----------------|-----|-----|-----|------|----------|--------------|------|------|------|------|---|---------|--|---|--|
| <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2">Material</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">A</td> <td>Aluminum - 6061-T6 3000† psi • 20.7 MPa</td> </tr> <tr> <td style="text-align: center;">D</td> <td>Ductile Iron - D4512 5000† psi • 34.5 MPa</td> </tr> </tbody> </table> <p>† Working pressure should be considered in accordance with ISO 4413 to determine appropriate material type.</p> | Material | | A | Aluminum - 6061-T6 3000† psi • 20.7 MPa | D | Ductile Iron - D4512 5000† psi • 34.5 MPa | <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2">Valve Pattern</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">D05</td> <td>ISO 4401-05-04 NFPA T3.5.1-D05 See Tech Information</td> </tr> </tbody> </table> | Valve Pattern | | D05 | ISO 4401-05-04 NFPA T3.5.1-D05 See Tech Information | <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2">Circuit</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">HS</td> <td>Series Circuit High Flow</td> </tr> </tbody> </table> | Circuit | | HS | Series Circuit High Flow | <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2">No. of Stations</th> </tr> </thead> <tbody> <tr> <td colspan="2" style="text-align: center;">Aluminum</td> </tr> <tr> <td style="text-align: center;">02...04</td> <td>Available with spacing code 3</td> </tr> <tr> <td style="text-align: center;">02...04</td> <td>Available with spacing code 5</td> </tr> <tr> <td colspan="2" style="text-align: center;">Ductile Iron</td> </tr> <tr> <td style="text-align: center;">02...04</td> <td>Available with spacing code 3</td> </tr> <tr> <td style="text-align: center;">02...04</td> <td>Available with spacing code 5</td> </tr> </tbody> </table> | No. of Stations | | Aluminum | | 02...04 | Available with spacing code 3 | 02...04 | Available with spacing code 5 | Ductile Iron | | 02...04 | Available with spacing code 3 | 02...04 | Available with spacing code 5 | <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2">Valve Spacing</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">3</td> <td>3.25 inch 82.6 mm</td> </tr> <tr> <td style="text-align: center;">5</td> <td>5.00 inch 127.0 mm</td> </tr> </tbody> </table> | Valve Spacing | | 3 | 3.25 inch 82.6 mm | 5 | 5.00 inch 127.0 mm | <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="6">Port Threads</th> </tr> <tr> <th></th> <th>P,A,B</th> <th>T</th> <th>X,Y,L optional</th> <th colspan="2">GA</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">P</td> <td>NPTF • ANSI B1.20.3</td> <td>0.75</td> <td>1.00</td> <td>0.38</td> <td>0.25</td> </tr> <tr> <td style="text-align: center;">S</td> <td>SAE • ISO 11926</td> <td>-12</td> <td>-16</td> <td>-6</td> <td>-6</td> </tr> <tr> <td style="text-align: center;">B</td> <td>BSPP • ISO 1179</td> <td>0.75</td> <td>1.00</td> <td>0.38</td> <td>none</td> </tr> <tr> <td style="text-align: center;">M</td> <td>ISO • ISO 6149</td> <td>M27</td> <td>M33</td> <td>M14</td> <td>none</td> </tr> <tr> <td style="text-align: center;">T</td> <td>BSPT • ISO 7</td> <td>0.75</td> <td>1.00</td> <td>0.38</td> <td>none</td> </tr> </tbody> </table> | Port Threads | | | | | | | P,A,B | T | X,Y,L optional | GA | | P | NPTF • ANSI B1.20.3 | 0.75 | 1.00 | 0.38 | 0.25 | S | SAE • ISO 11926 | -12 | -16 | -6 | -6 | B | BSPP • ISO 1179 | 0.75 | 1.00 | 0.38 | none | M | ISO • ISO 6149 | M27 | M33 | M14 | none | T | BSPT • ISO 7 | 0.75 | 1.00 | 0.38 | none | <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2">Options</th> </tr> </thead> <tbody> <tr> <td colspan="2">See next page for available options and ordering codes.</td> </tr> </tbody> </table> | Options | | See next page for available options and ordering codes. | |
| Material | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| A | Aluminum - 6061-T6 3000† psi • 20.7 MPa | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| D | Ductile Iron - D4512 5000† psi • 34.5 MPa | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Valve Pattern | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| D05 | ISO 4401-05-04 NFPA T3.5.1-D05 See Tech Information | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Circuit | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| HS | Series Circuit High Flow | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| No. of Stations | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Aluminum | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 02...04 | Available with spacing code 3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 02...04 | Available with spacing code 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Ductile Iron | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 02...04 | Available with spacing code 3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 02...04 | Available with spacing code 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Valve Spacing | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 3.25 inch 82.6 mm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | 5.00 inch 127.0 mm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Port Threads | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | P,A,B | T | X,Y,L optional | GA | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| P | NPTF • ANSI B1.20.3 | 0.75 | 1.00 | 0.38 | 0.25 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| S | SAE • ISO 11926 | -12 | -16 | -6 | -6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| B | BSPP • ISO 1179 | 0.75 | 1.00 | 0.38 | none | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| M | ISO • ISO 6149 | M27 | M33 | M14 | none | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| T | BSPT • ISO 7 | 0.75 | 1.00 | 0.38 | none | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Options | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| See next page for available options and ordering codes. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Options - D05 High Flow Series Manifold

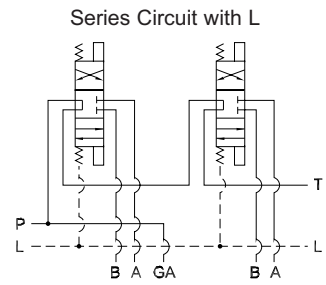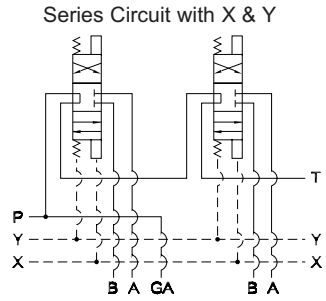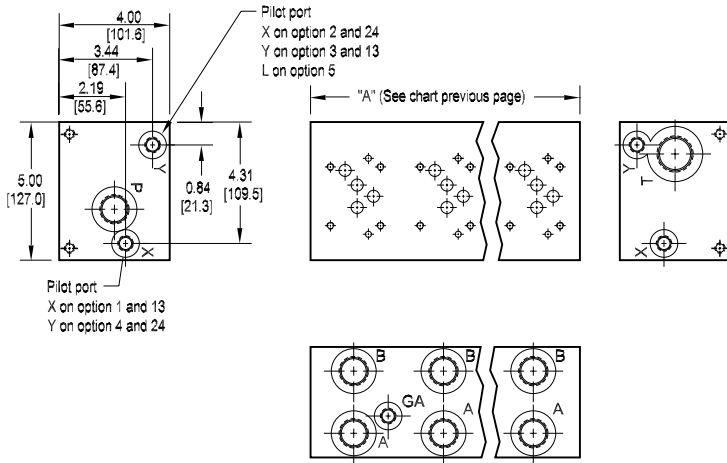

Ordering Information



| Pilot Ports | |
|----------------------------------|--|
| Omit if pilot ports not required | |
| 1 | X port (USA std) NFFPA T3.5.1-D05 Alt-B |
| 3 | Y port (USA std) NFFPA T3.5.1-D05 Alt-B |
| 13 | X & Y ports (USA std) NFFPA T3.5.1-D05 Alt-B |
| 2 | X port ISO 4401-05-05 NFFPA T3.5.1-D05 Alt-A |
| 4 | Y port ISO 4401-05-05 NFFPA T3.5.1-D05 Alt-A |
| 24 | X & Y ports ISO 4401-05-05 NFFPA T3.5.1-D05 Alt-A |
| 5 | L ports Proportional valves |