


# 2F06, 2F07 Flow Control Subplates


## 2F06 Side Ported Subplate

Valve mtg: UNC 0.31-18 x 0.88 DP  
 Subplate hardware kit is supplied.  
 See page 123 for itemized list.

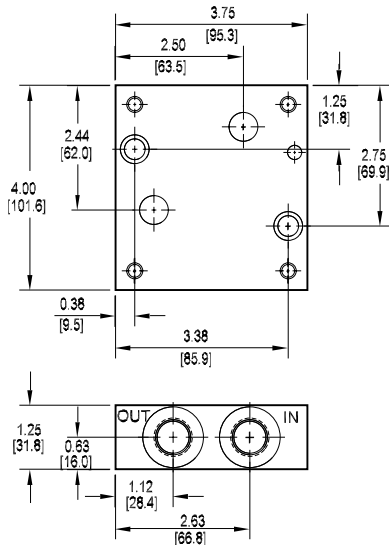

## 2F07 Side Ported Subplate

Valve mtg: UNC 0.38-16 x 1.00 DP  
 Subplate hardware kit is supplied.  
 See page 123 for itemized list.

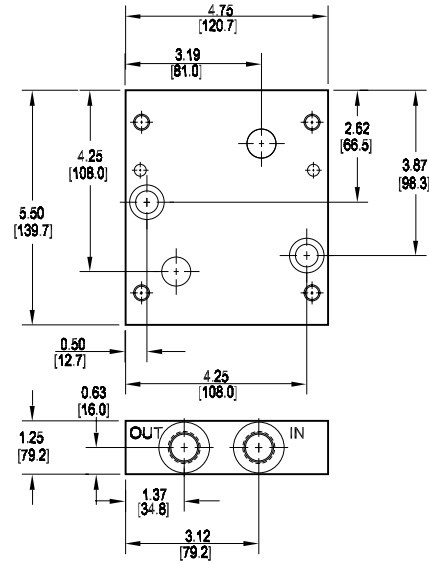

Specifications, descriptions, and dimensional data are subject to correction or change without notice or incurring obligation. Download latest catalog page revisions at [www.damanifolds.com](http://www.damanifolds.com).

## Ordering Information

Material	Valve Pattern	Product Type	Port Location	Port Threads																																		
<table border="1"> <thead> <tr> <th colspan="2">Material</th> </tr> </thead> <tbody> <tr> <td><b>A</b></td> <td>Aluminum - 6061-T6 3000† psi • 20.7 MPa</td> </tr> <tr> <td><b>D</b></td> <td>Ductile Iron - D4512 5000† psi • 34.5 MPa</td> </tr> <tr> <td colspan="2">† Working pressure should be considered in accordance with ISO 4413 to determine appropriate material type.</td> </tr> </tbody> </table>	Material		<b>A</b>	Aluminum - 6061-T6 3000† psi • 20.7 MPa	<b>D</b>	Ductile Iron - D4512 5000† psi • 34.5 MPa	† Working pressure should be considered in accordance with ISO 4413 to determine appropriate material type.		<table border="1"> <thead> <tr> <th colspan="2">Valve Pattern</th> </tr> </thead> <tbody> <tr> <td><b>2F06</b></td> <td>ISO 6263-06-05 NFFPA T3.5.1-2F06 See Tech Information</td> </tr> <tr> <td><b>2F07</b></td> <td>ISO 6263-07-09 NFFPA T3.5.1-2F07 See Tech Information</td> </tr> </tbody> </table>	Valve Pattern		<b>2F06</b>	ISO 6263-06-05 NFFPA T3.5.1-2F06 See Tech Information	<b>2F07</b>	ISO 6263-07-09 NFFPA T3.5.1-2F07 See Tech Information	<table border="1"> <thead> <tr> <th colspan="2">Product Type</th> </tr> </thead> <tbody> <tr> <td><b>SP</b></td> <td>Subplate</td> </tr> </tbody> </table>	Product Type		<b>SP</b>	Subplate	<table border="1"> <thead> <tr> <th colspan="2">Port Location</th> </tr> </thead> <tbody> <tr> <td><b>S</b></td> <td>Side ported</td> </tr> </tbody> </table>	Port Location		<b>S</b>	Side ported	<table border="1"> <thead> <tr> <th colspan="2">Port Threads</th> </tr> </thead> <tbody> <tr> <td colspan="2">2F06 only</td> </tr> <tr> <td><b>6P</b></td> <td>0.38-18 NPTF ANSI B1.20.3</td> </tr> <tr> <td colspan="2">2F06 or 2F07</td> </tr> <tr> <td><b>8P</b></td> <td>0.50-14 NPTF ANSI B1.20.3</td> </tr> <tr> <td><b>8S</b></td> <td>-8 SAE ISO 11926; SAE 1926</td> </tr> </tbody> </table>	Port Threads		2F06 only		<b>6P</b>	0.38-18 NPTF ANSI B1.20.3	2F06 or 2F07		<b>8P</b>	0.50-14 NPTF ANSI B1.20.3	<b>8S</b>	-8 SAE ISO 11926; SAE 1926
Material																																						
<b>A</b>	Aluminum - 6061-T6 3000† psi • 20.7 MPa																																					
<b>D</b>	Ductile Iron - D4512 5000† psi • 34.5 MPa																																					
† Working pressure should be considered in accordance with ISO 4413 to determine appropriate material type.																																						
Valve Pattern																																						
<b>2F06</b>	ISO 6263-06-05 NFFPA T3.5.1-2F06 See Tech Information																																					
<b>2F07</b>	ISO 6263-07-09 NFFPA T3.5.1-2F07 See Tech Information																																					
Product Type																																						
<b>SP</b>	Subplate																																					
Port Location																																						
<b>S</b>	Side ported																																					
Port Threads																																						
2F06 only																																						
<b>6P</b>	0.38-18 NPTF ANSI B1.20.3																																					
2F06 or 2F07																																						
<b>8P</b>	0.50-14 NPTF ANSI B1.20.3																																					
<b>8S</b>	-8 SAE ISO 11926; SAE 1926																																					