
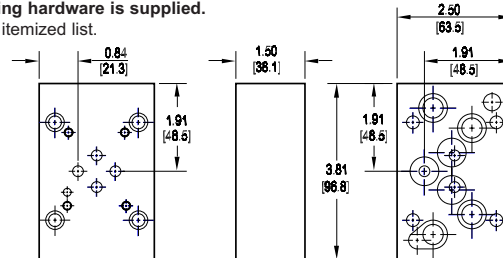


# Valve Adaptors for D05 Manifolds with Pilot Ports



## Adapt D03 valve to D05H manifold

Valve mtg: #10-24 UNC x 0.50 DP or  
Metric M5-0.8mm ISO 6H x [12.7] DP  
Adaptor mounting hardware is supplied.  
See page 98 for itemized list.





## Adapt D05HE valve to D05H manifold

Adaptor interface seal kit is supplied.  
See page 98 for itemized list.

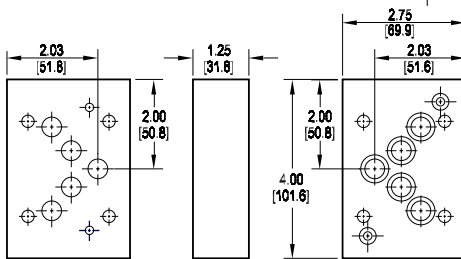

## Adapt D05H valve to D05HE manifold

Adaptor interface seal kit is supplied.  
See page 98 for itemized list.

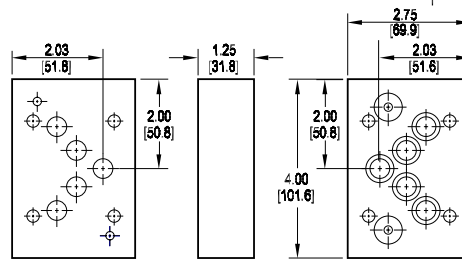

Specifications, descriptions, and dimensional data are subject to correction or change without notice or incurring obligation.  
Download latest catalog page revisions at [www.damanifolds.com](http://www.damanifolds.com).

# Ordering Information

Material	Valve Pattern	Manifold Pattern	Product Type	Port Orientation	Bolt Threads
----------	---------------	------------------	--------------	------------------	--------------

Material	
<b>A</b>	Aluminum - 6061-T6 30000† psi • 20.7 MPa
<b>D</b>	Ductile Iron - D4512 50000† psi • 34.5 MPa

† Working pressure should be considered in accordance with ISO 4413 to determine appropriate material type.

Manifold Pattern	
See Tech Information	
<b>D05H</b>	ISO 4401-05-05 NFPA T3.5.1-D05 Alt A & B
<b>D05HE</b>	ISO 4401-05-05 NFPA T3.5.1-D05 Alt A

Port Orientation	
<b>AB</b>	A <sub>V</sub> common to A <sub>m</sub> B <sub>V</sub> common to B <sub>m</sub>

Valve Pattern	
See Tech Information	
<b>D03</b>	ISO 4401-03-02 NFPA T3.5.1-D03
<b>D05H</b>	(USA std) NFPA T3.5.1-D05 Alt B
<b>D05HE</b>	ISO 4401-05-05 NFPA T3.5.1-D05 Alt A

Product Type	
<b>VA</b>	Valve Adaptor

Bolt Threads	
Omit for inch (UNC) bolt kit.	
<b>M</b>	Metric (ISO 6H) bolt kit