


# Valve Adaptors for D10 Manifolds

## Adapt D07 valve to D10 manifold

Valve mtg: 0.25-20 UNC x 0.75 DP and  
0.38-16 UNC x 1.00 DP or  
Metric M6-1.0mm ISO 6H x [19.1] DP and  
M10-1.5mm ISO 6H x [25.4] DP




Adaptor mounting hardware is supplied.  
See page 99 for itemized list.



## Adapt D08 valve to D10 manifold

Valve mtg: UNC 0.50-13 x 1.19 DP or  
Metric M12-1.75mm ISO 6H x [30.2] DP

Adaptor mounting hardware is supplied.  
See page 99 for itemized list.

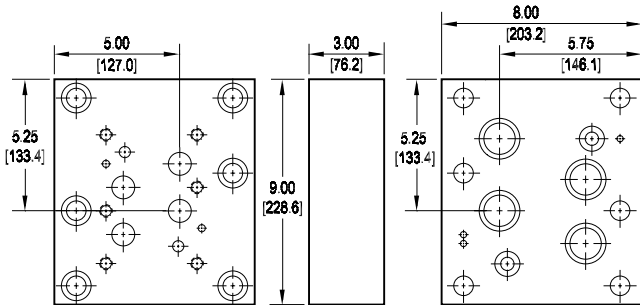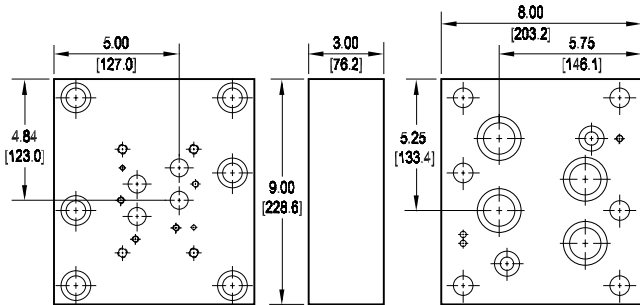

Specifications, descriptions, and dimensional data are subject to correction or change without notice or incurring obligation. Download latest catalog page revisions at [www.damanifolds.com](http://www.damanifolds.com).

## Ordering Information

Material	Valve Pattern	Manifold Pattern	Product Type	Port Orientation	Bolt Threads																																
<table border="1"> <thead> <tr> <th colspan="2">Material</th> </tr> </thead> <tbody> <tr> <td><b>A</b></td> <td>Aluminum - 6061-T6 3000† psi • 20.7 MPa</td> </tr> <tr> <td><b>D</b></td> <td>Ductile Iron - D4512 5000† psi • 34.5 MPa</td> </tr> <tr> <td colspan="2">† Working pressure should be considered in accordance with ISO 4413 to determine appropriate material type.</td> </tr> </tbody> </table>	Material		<b>A</b>	Aluminum - 6061-T6 3000† psi • 20.7 MPa	<b>D</b>	Ductile Iron - D4512 5000† psi • 34.5 MPa	† Working pressure should be considered in accordance with ISO 4413 to determine appropriate material type.		<table border="1"> <thead> <tr> <th colspan="2">Valve Pattern</th> </tr> </thead> <tbody> <tr> <td><b>D07</b></td> <td>ISO 4401-07-06 NFFPA T3.5.1-D07 See Tech Information</td> </tr> <tr> <td><b>D08</b></td> <td>ISO 4401-08-07 NFFPA T3.5.1-D08 See Tech Information</td> </tr> </tbody> </table>	Valve Pattern		<b>D07</b>	ISO 4401-07-06 NFFPA T3.5.1-D07 See Tech Information	<b>D08</b>	ISO 4401-08-07 NFFPA T3.5.1-D08 See Tech Information	<table border="1"> <thead> <tr> <th colspan="2">Manifold Pattern</th> </tr> </thead> <tbody> <tr> <td><b>D10</b></td> <td>ISO 4401-10-08 NFFPA T3.5.1-D10 See Tech Information</td> </tr> </tbody> </table>	Manifold Pattern		<b>D10</b>	ISO 4401-10-08 NFFPA T3.5.1-D10 See Tech Information	<table border="1"> <thead> <tr> <th colspan="2">Product Type</th> </tr> </thead> <tbody> <tr> <td><b>VA</b></td> <td>Valve Adaptor</td> </tr> </tbody> </table>	Product Type		<b>VA</b>	Valve Adaptor	<table border="1"> <thead> <tr> <th colspan="2">Port Orientation</th> </tr> </thead> <tbody> <tr> <td><b>AB</b></td> <td>A<sub>V</sub> common to A<sub>M</sub> B<sub>V</sub> common to B<sub>M</sub></td> </tr> </tbody> </table>	Port Orientation		<b>AB</b>	A <sub>V</sub> common to A <sub>M</sub> B <sub>V</sub> common to B <sub>M</sub>	<table border="1"> <thead> <tr> <th colspan="2">Bolt Threads</th> </tr> </thead> <tbody> <tr> <td colspan="2">Omit for inch (UNC) bolt kit.</td> </tr> <tr> <td><b>M</b></td> <td>Metric (ISO 6H) bolt kit</td> </tr> </tbody> </table>	Bolt Threads		Omit for inch (UNC) bolt kit.		<b>M</b>	Metric (ISO 6H) bolt kit
Material																																					
<b>A</b>	Aluminum - 6061-T6 3000† psi • 20.7 MPa																																				
<b>D</b>	Ductile Iron - D4512 5000† psi • 34.5 MPa																																				
† Working pressure should be considered in accordance with ISO 4413 to determine appropriate material type.																																					
Valve Pattern																																					
<b>D07</b>	ISO 4401-07-06 NFFPA T3.5.1-D07 See Tech Information																																				
<b>D08</b>	ISO 4401-08-07 NFFPA T3.5.1-D08 See Tech Information																																				
Manifold Pattern																																					
<b>D10</b>	ISO 4401-10-08 NFFPA T3.5.1-D10 See Tech Information																																				
Product Type																																					
<b>VA</b>	Valve Adaptor																																				
Port Orientation																																					
<b>AB</b>	A <sub>V</sub> common to A <sub>M</sub> B <sub>V</sub> common to B <sub>M</sub>																																				
Bolt Threads																																					
Omit for inch (UNC) bolt kit.																																					
<b>M</b>	Metric (ISO 6H) bolt kit																																				